

MICRO SWITCH

P/N:KW01-01



Professional Manufacturer Since 2000

SPECIFICATIONS

Function: Momentary action
 Contact Arrangement: SPST, Normally Open
 Termination: THD version

Mechanical

Actuation Force: 45±15grams
 Life Expectancy: 50,000 Operations

Electrical

Contact Rating: 50mA @ 12V DC
 Dielectric Strength: 250V AC for 1minute
 Contact Resistance: 150mΩ Max.
 Insulation Resistance: 50MΩ Min.
 Travel: 0.4-1.0mm

Environmental


Operating Temperature: -10~+50°C
 Relative Humidity: (35°C) ≤85%

Materials


4.Stem: Black GP.PA66
 3.Contact: Copper with Silver cladding
 2.Holder: Black GP.PA66
 1.Terminal: Copper with Silver Cladding

Packaging


Bulk Package
 Inner Package: Plastic bag
 Outer Package: Carton

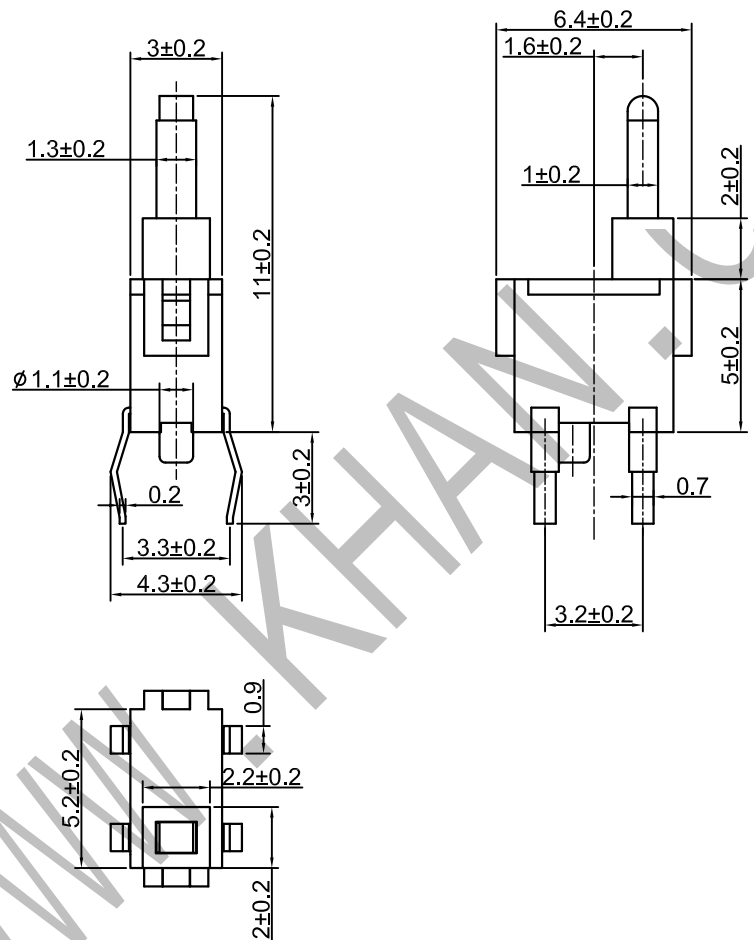

CIRCUIT DIAGRAM



P. C. B. LAYOUT



WENZHOU KHAN ELECTRONIC

VERSION		PROJECTION	DESIGN	SHUQING ZHU
KH14FE22E			DRAWN	ZHONGJU PENG
SCALE	SIZE	Dimensions are shown:mm(inches)	APPROVAL	JUNHUI XU
1:1	A4		2019.10.18	